



# DOPUSZCZALNE PARAMETRY ROBOCZE ARMATURY DLA STOSOWANYCH MATERIAŁÓW


GP240GH (1.0619)

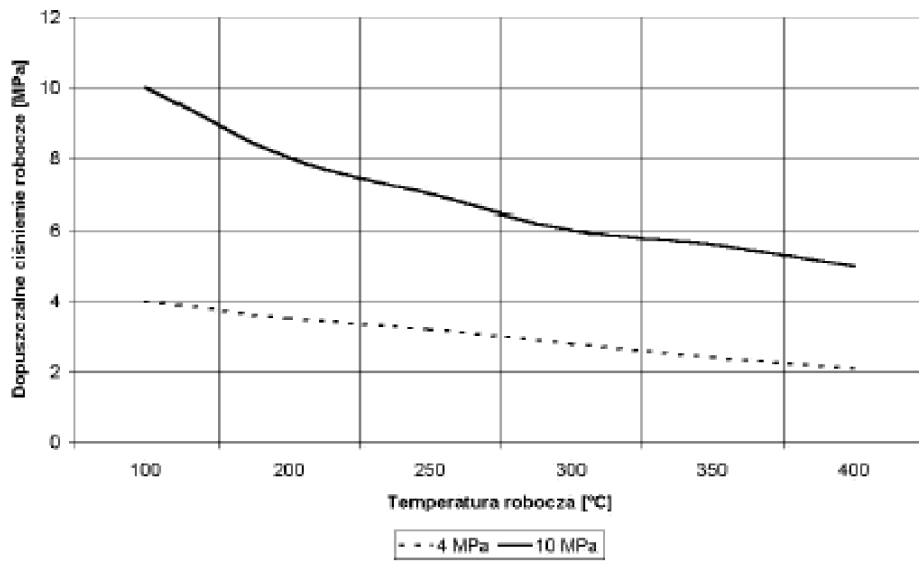


H17N13M2T (1.4571)

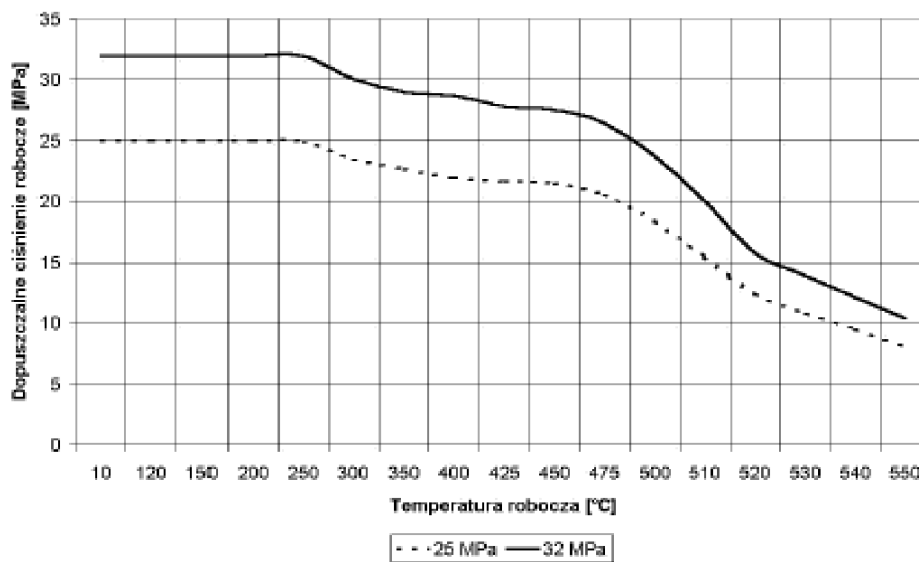


15HM

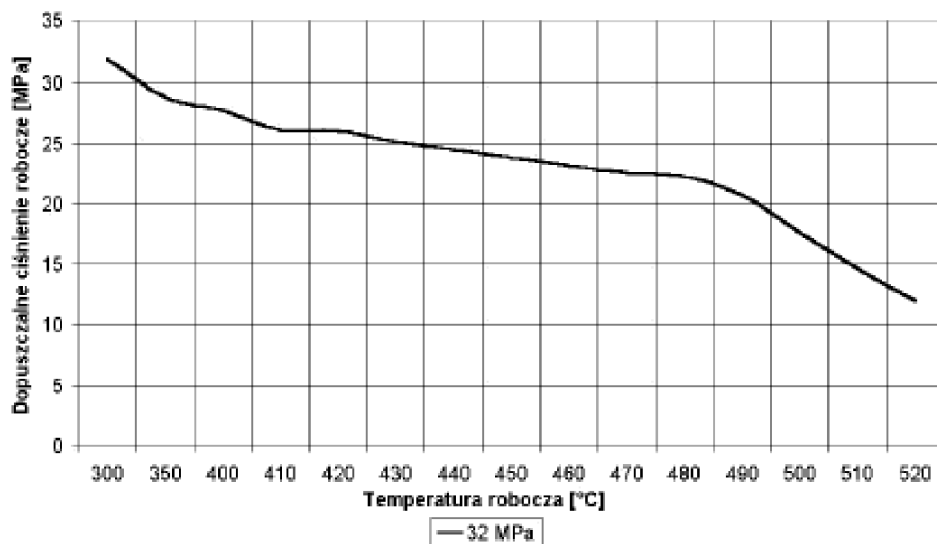


10H2M (1.7380)

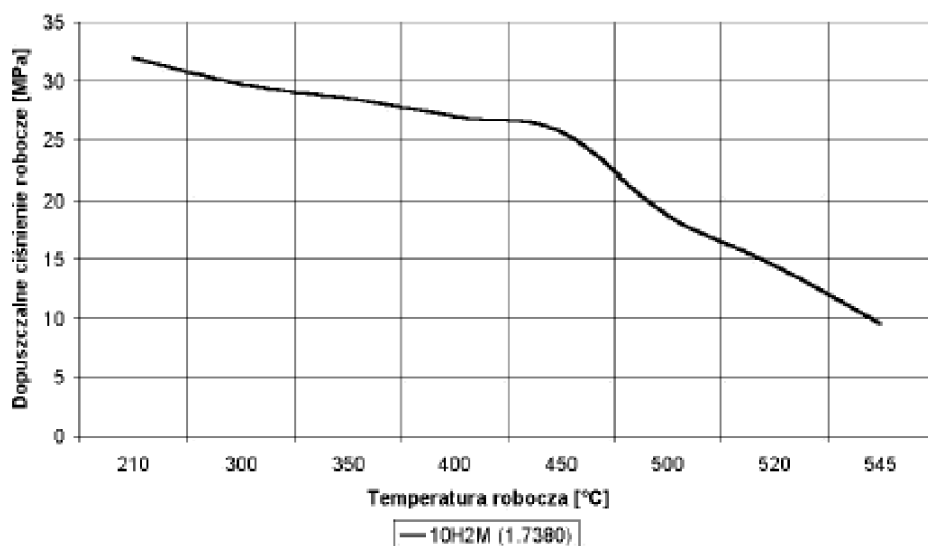


A216WCB

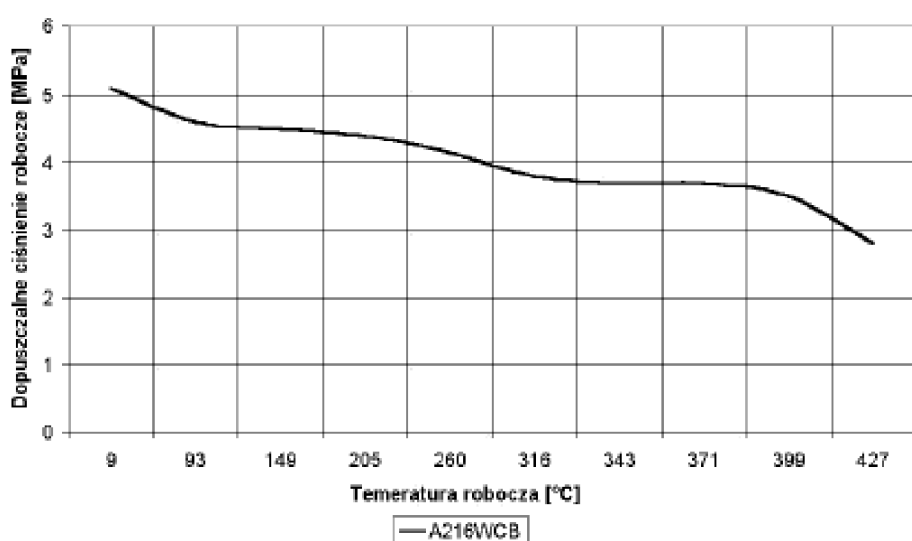

C22.8 (1.0460)

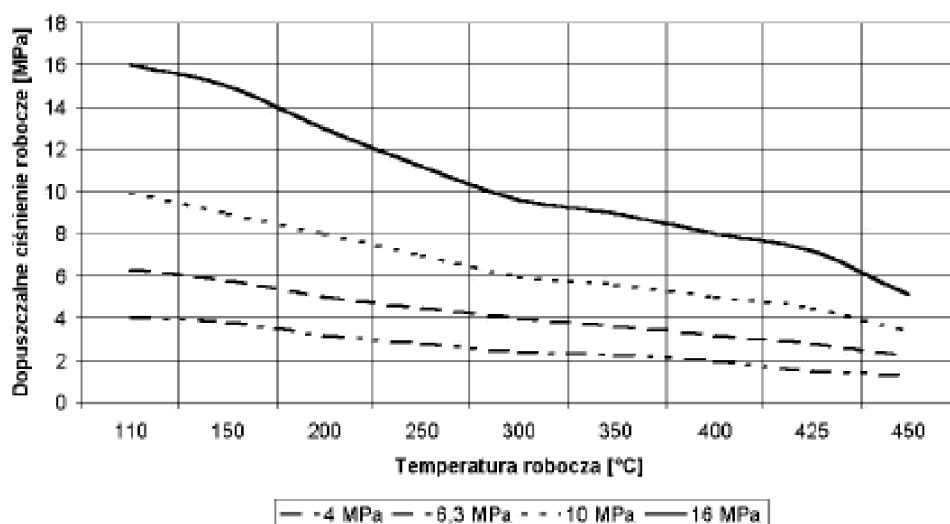

L0H18N10M2 (1.4408)

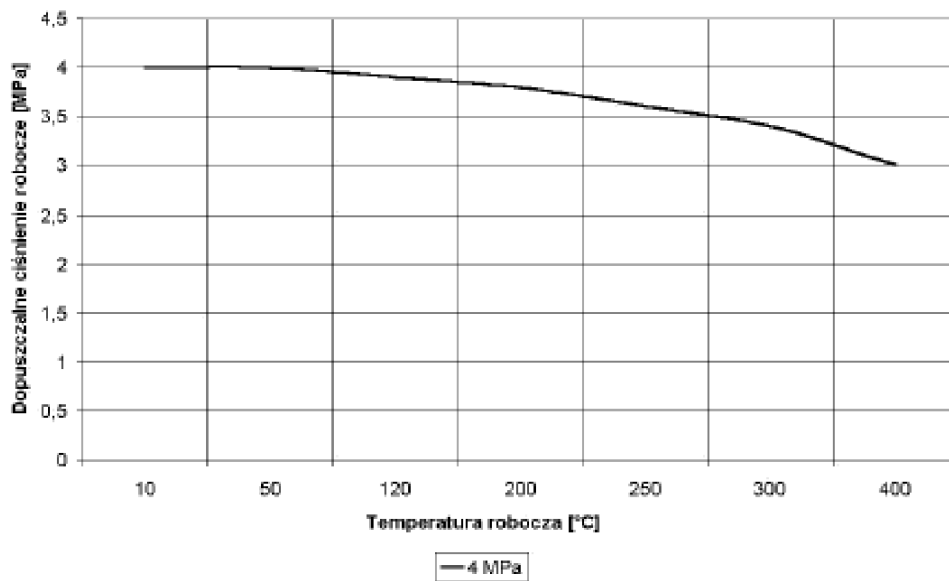

A105

